


LINE SPECIFICATIONS

Drum width:	23.5"
Maximum paper width:	55.75"
Maximum paper speed:	1.180 feet / minute
Maximum production speed in double stream:	up to 3000 bags / minute
Maximum production speed in single stream:	up to 1500 bags / minute
Bag making machine width (A):	94.5"
Bag making machine height (B):	73"
Bag making machine length (C):	185"
Full line length with printer and unwinder (D):	441"

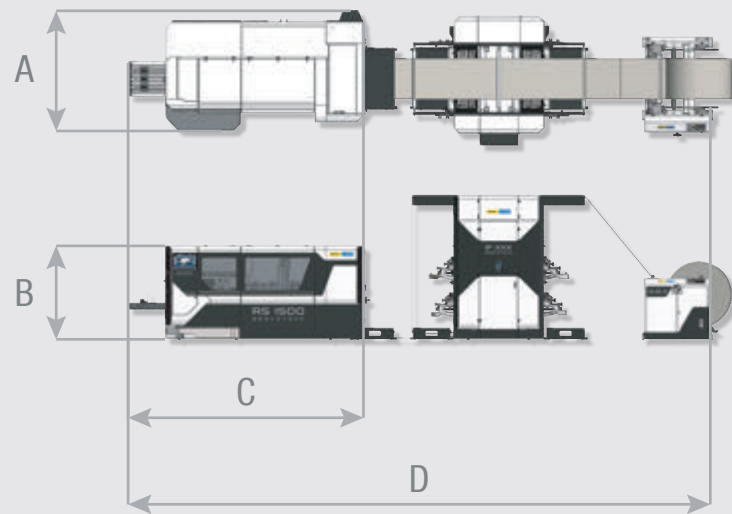


RS 1500
SERVOTECH

RS 1500
SERVOTECH

BAG SPECIFICATIONS


Bag width in double stream:	2.75" - 10.4"
Bag width in single stream:	2.75" - 21.25"
Cutting length:	3.15" - 12.5"
Gusset open:	1" - 6.3"
Flap height:	0.52"
Paper weight:	25 g/m ² - 80 g/m ²

OPTIONS

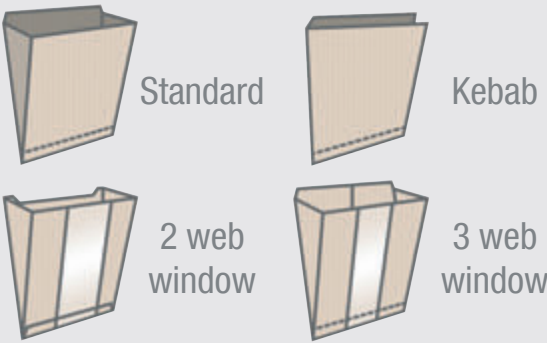

RS 1500 Video

Scan QR code:



HolwegWeber North America
+1 920 894 2221 - info@holwegweber.com

HolwegWeber Europe
+33 3 88 47 84 84 - holweg@holweg.fr

HolwegWeber Asia-Pacific
+86 20 3485 5787 / 5189 / 5797


Version: RS1500_EN_LUS 210831-P

FLAT BOTTOM BAG SOLUTIONS



www.holwegweber.com

FLAT BOTTOM BAG SOLUTIONS

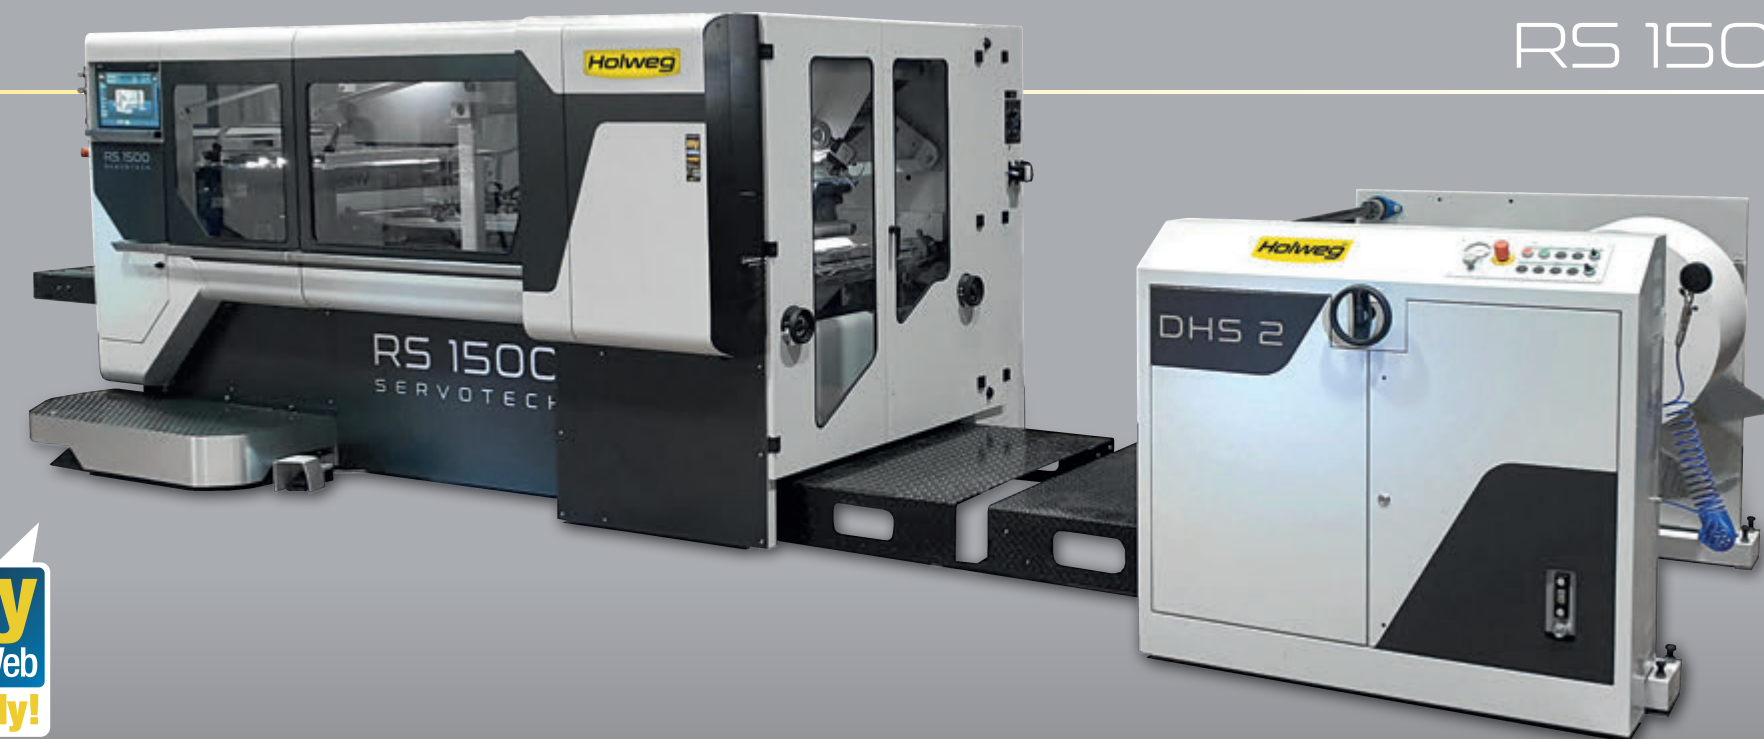


RS 1500



SIMPLE MAINTENANCE

The RS 1500 was developed to make maintenance quick and simple. This is achieved by simplifying the operator access, mechanical parts, assemblies, and reduced standardized tools for servicing the RS 1500.

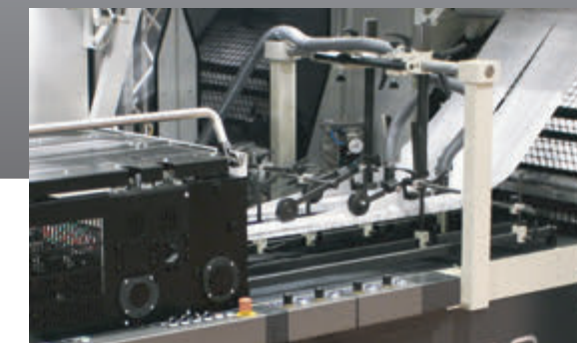

SAFE AND EASY TO OPERATE

HolwegWeber puts safety and efficiency at the forefront of their design, which has led to the development of advanced safety and ease of operation features.



NEW USER-FRIENDLY HMI SCREENS

The HMI works with a new 19" swivel screen that offers user-friendly and modern interface. Navigation is also made more intuitive through simplified settings menus. The HMI is connected in real time to myHolWeb functions.